

**CODE EXPLANATION**

**IB4- 3.2 X 0.89 / 1500 R - BA / BA - GM**

DIMENSIONS "X" AND "Y" CUSTOMER DEFINED IN [MILIMETERS]


TOTAL LENGTH "TL" CUSTOMER DEFINED IN [MILIMETERS]

FIBERS JACKET ARE REMOVED

	NOT REMOVED
R	REMOVED

FERRULE MATERIAL	
S3	STAINLES STEEL
A	ALUMINIUM
BA	BLACK ALUMINIUM
P	PLASTIC
CD	CUSTOMER DEFINED

JACKETING TYPE	
P	PVC
GM	GALVANIZED STEEL PVC MONOCOIL
SS	STAINLESS STEEL
S	SILICONE
CD	CUSTOMER DEFINED

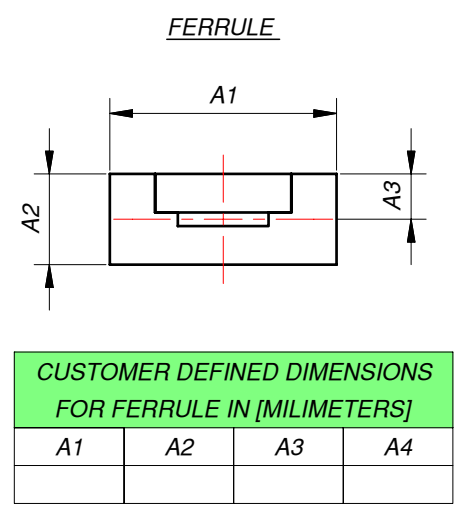

- MULTIMODE OPTICAL FIBER SELECTION:**
- POSSIBLE FIBER TRANSMISSION IN THE RANGE:
    - ZLUV 180 - 1200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
    - ZLWF 400 - 2200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
    - ZLPUV 250 - 1100 NM (NA=0.37).
    - ZLPWF 400 - 2200 NM (NA=0.37).
  - STRESS PROOF LOAD 100KPSI.
  - FOR OTHER FIBER PARAMETERS PLEASE LOOK FIBER CATALOG.

TITLE: <b>IB4 - FIBER BUNDLE STANDARD I - BUNDLE</b>		
SIZE: <b>A3</b>	DRAWING NO.: <b>IB4-001-00</b>	REV.: <b>A</b>
FILE NAME: IB4-001-00.idw	ITEM NO.:	
COMPANY: Z-LIGHT, LTD.	CODE NO.:	
HOME PAGE: <a href="http://www.z-light.lv">HTTP://WWW.Z-LIGHT.LV</a>	ORDER NO.:	
SCALE: DO NOT SCALE	DIMENSIONS ARE IN MM	SHEET 1 OF 1

FERRULES COULD BE MADE IN ACCORDANCE WITH CUSTOMER DRAWINGS