

CODE EXPLANATION

YB8 - 1.5 / 1200 / [] / 50 R - SMA - GM

ACTIVE DIAMETER "AD" IN [MM]
CUSTOMER DEFINED MAX. 2MM

LENGTH "L1" IN [MM]
CUSTOMER DEFINED

RANDOMIZATION

	TYPE "ZR"
CR	TYPE "CR"
CD	CUSTOMER


PERCENTS OF FIBERS FROM LEG "A" GO TO LEG "B1"
CUSTOMER DEFINED

FIBERS JACKET ARE REMOVED

	NOT REMOVED
R	REMOVED

JACKETING TYPE

P	PVC
GM	GALVANIZED STEEL PVC MONOCOIL
SS	STAINLESS STEEL
S	SILICONE
CD	CUSTOMER DEFINED

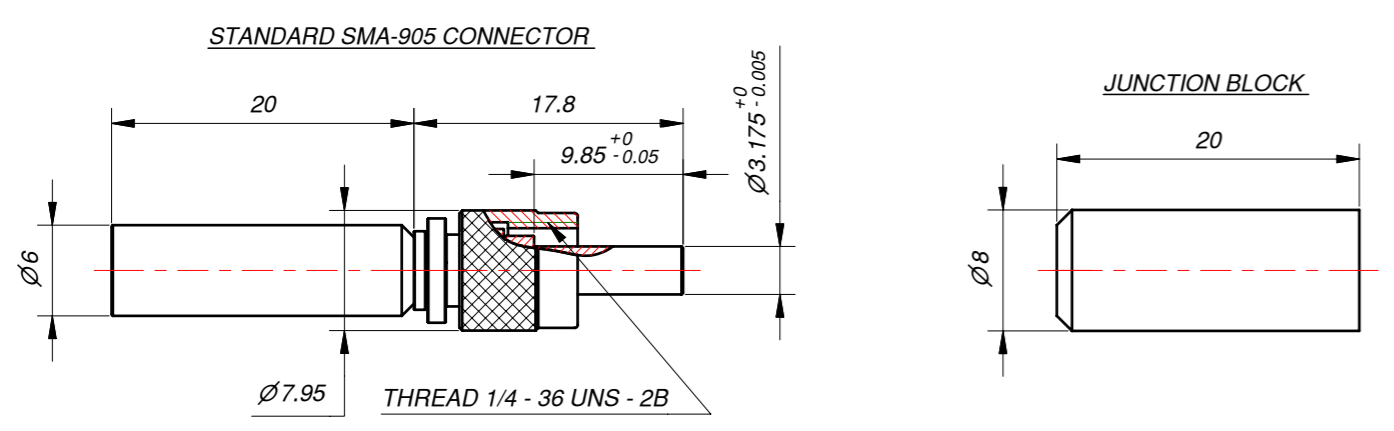

MULTIMODE OPTICAL FIBER SELECTION:

- POSSIBLE FIBER TRANSMISSION IN THE RANGE:
 - ZLUV 180 - 1200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
 - ZLWF 400 - 2200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
 - ZLPUV 250 - 1100 NM (NA=0.37).
 - ZLPWF 400 - 2200 NM (NA=0.37).
- STRESS PROOF LOAD 100KPSI.
- FOR OTHER FIBER PARAMETERS PLEASE LOOK FIBER CATALOG.

TITLE: YB8 - FIBER BUNDLE STANDARD Y - BUNDLE		
SIZE: A2	DRAWING NO.: YB8-001-00	REV.: A
FILE NAME: YB8-001-00.idw	ITEM NO.:	
COMPANY: Z-LIGHT, LTD.	CODE NO.:	
HOME PAGE: HTTP://WWW.Z-LIGHT.LV	ORDER NO.:	
SCALE: DO NOT SCALE	DIMENSIONS ARE IN MM	SHEET 1 OF 1