


CUSTOMER DEFINED DIMENSIONS FOR FERRULE "A" IN [MILIMETERS]			
$\varnothing D1$	$\varnothing D2$	A1	A2

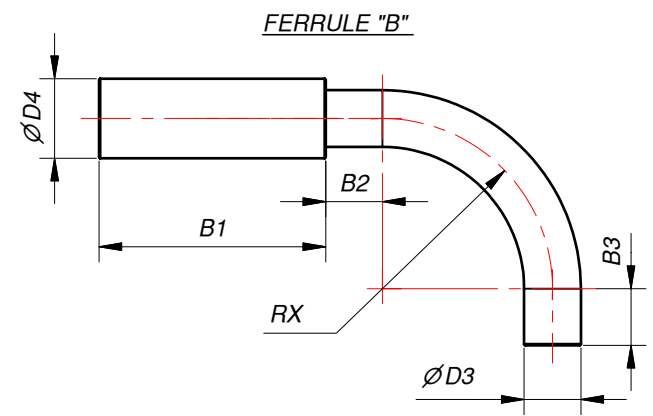

CUSTOMER DEFINED DIMENSIONS FOR FERRULE "B" IN [MILIMETERS]					
$\varnothing D3$	$\varnothing D4$	B1	B2	B3	RX

CODE EXPLANATION

IFB4- 2.2 / 1500 R - S3 / S3 - GM

ACTIVE DIAMETER "AD"
CUSTOMER DEFINED
IN [MILIMETERS]

TOTAL LENGTH "TL"
CUSTOMER DEFINED
IN [MILIMETERS]

FIBERS JACKET ARE REMOVED

	NOT REMOVED
R	REMOVED

FERRULE "A" AND
FERRULE "B" MATERIAL

S3	STAINLES STEEL
A	ALUMINIUM
BA	BLACK ALUMINIUM
P	PLASTIC
CD	CUSTOMER DEFINED

JACKETING TYPE

P	PVC
GM	GALVANIZED STEEL PVC MONOCOIL
SS	STAINLESS STEEL
S	SILICONE
CD	CUSTOMER DEFINED

ACTIVE DIAMETER "AD1"

MULTIMODE OPTICAL FIBER SELECTION:

- POSSIBLE FIBER TRANSMISSION IN THE RANGE:
 - ZLUV 180 - 1200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
 - ZLWF 400 - 2200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).
 - ZLPUV 250 - 1100 NM (NA=0.37).
 - ZLPWF 400 - 2200 NM (NA=0.37).
- STRESS PROOF LOAD 100KPSI.
- FOR OTHER FIBER PARAMETERS PLEASE LOOK FIBER CATALOG.

FERRULES COULD BE MADE IN ACCORDANCE WITH CUSTOMER DRAWINGS

TITLE: IFB4 - FIBER BUNDLE FUSED IF - BUNDLE		
SIZE: A3	DRAWING NO.: IFB4-001-00	REV.: A
FILE NAME: IFB4-001-00.idw	ITEM NO.:	
COMPANY: Z-LIGHT, LTD.	CODE NO.:	
HOME PAGE: HTTP://WWW.Z-LIGHT.LV	ORDER NO.:	
SCALE: DO NOT SCALE	DIMENSIONS ARE IN MM	SHEET 1 OF 1