

CODE EXPLANATION

**IFB5 - 1.1 / 3000 R - S3 / SMA - GM**

ACTIVE DIAMETER "AD"  
CUSTOMER DEFINED  
IN [MILIMETERS] MAX. 2MM

TOTAL LENGTH "TL"  
CUSTOMER DEFINED  
IN [MILIMETERS]

FIBERS JACKET ARE REMOVED


	NOT REMOVED
R	REMOVED

FERRULE "A" MATERIAL

S3	STAINLES STEEL
A	ALUMINIUM
BA	BLACK ALUMINIUM
P	PLASTIC
CD	CUSTOMER DEFINED


JACKETING TYPE

P	PVC
GM	GALVANIZED STEEL PVC MONOCOIL
SS	STAINLESS STEEL
S	SILICONE
CD	CUSTOMER DEFINED

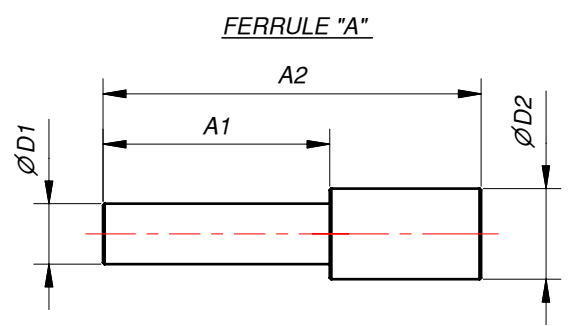

CUSTOMER DEFINED DIMENSIONS  
FOR FERRULE "A" IN [MILIMETERS]

∅D1	∅D2	A1	A2

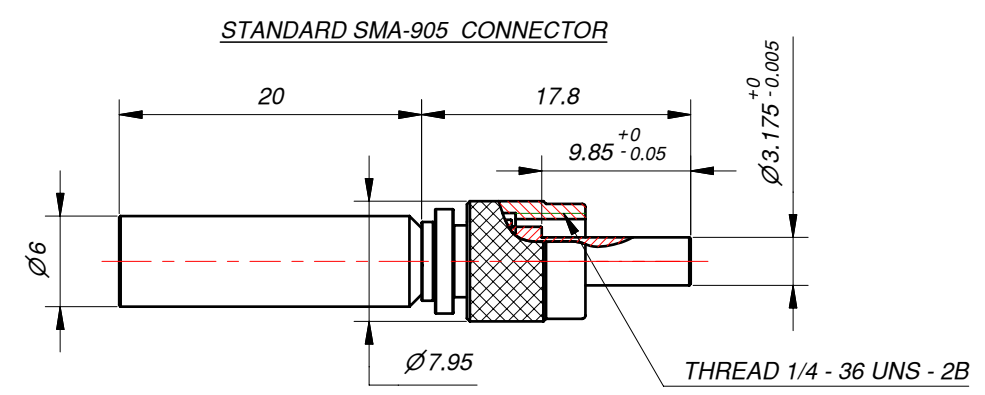

- MULTIMODE OPTICAL FIBER SELECTION:**
- POSSIBLE FIBER TRANSMISSION IN THE RANGE:  
 ZLUV 180 - 1200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).  
 ZLWF 400 - 2200 NM (NA=0.22; 0.26; LOWER NA ON REQUEST).  
 ZLPUV 250 - 1100 NM (NA=0.37).  
 ZLPWF 400 - 2200 NM (NA=0.37).
  - STRESS PROOF LOAD 100KPSI.
  - FOR OTHER FIBER PARAMETERS PLEASE LOOK FIBER CATALOG.

FERRULES COULD BE MADE IN ACCORDANCE WITH CUSTOMER DRAWINGS

TITLE: <b>IFB5 - FIBER BUNDLE FUSED IF - BUNDLE</b>		
SIZE: <b>A3</b>	DRAWING NO.: <b>IFB5-001-00</b>	REV.: <b>A</b>
FILE NAME: IFB5-001-00.idw	ITEM NO.:	
COMPANY: Z-LIGHT, LTD.	CODE NO.:	
HOME PAGE: HTTP://WWW.Z-LIGHT.LV	ORDER NO.:	
SCALE: DO NOT SCALE	DIMENSIONS ARE IN MM	SHEET 1 OF 1